



▲ 95LA1

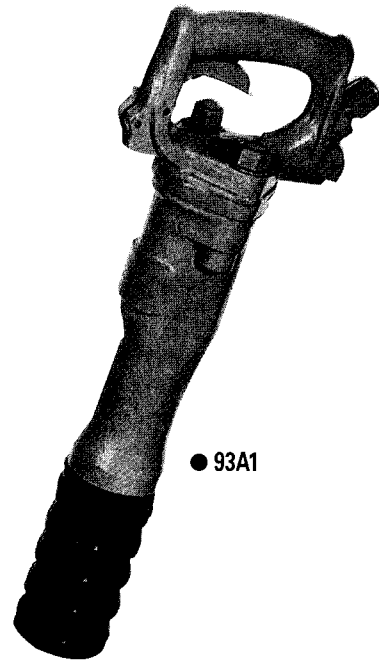

● 93A1

Product Identification

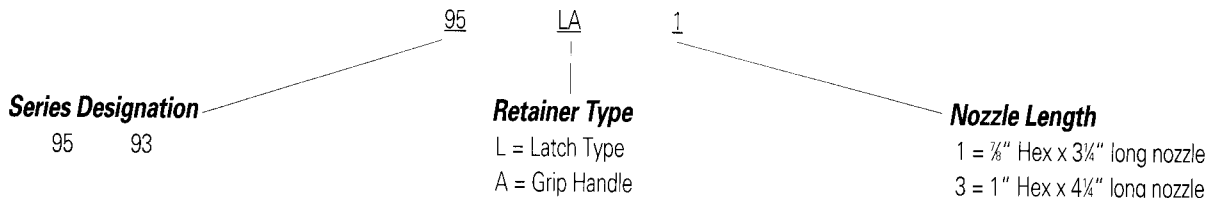

Features:

Lightweight for loose medium and horizontal use.
 Medium weight for medium density earth and light demolition.
 Heavy weight for rock-laden and dense earth and heavy demolition.
 Extra long nozzles for reduced wear and long life.

Equipment at Extra Price:

3/4" square x 2 3/4" long nozzle, No. 73H-84.
 Swivel Adapter No. HH1-A165.
 Muffler – see page 15

Model	Retainer Type	Shank Size Hex with Collar in.	Shank Type*	Handle Type	Trigger Type	Piston Stroke		Bore		Blows per Minute	Length without Accessory		Weight without Accessory		CFM
						in.	mm	in.	mm		in.	mm	lb	kg	
Lightweight with Inside Trigger Grip Handle															
● 93A1	Sleeve	3/8 x 3 3/4	A	D-Grip	Inside	2 1/2	64	1 1/8	43	2350	18 3/8	479	22	10	45
93A4	Hitch	3/8 x 3 3/4	B	D-Grip	Inside	2 1/2	64	1 1/8	43	2350	17 3/8	454	21	9.5	45
93LA1	Latch	3/8 x 3 3/4	A	D-Grip	Inside	2 1/2	64	1 1/8	43	2350	18 3/8	479	23	10.4	45
Medium Weight with Inside Trigger Grip Handle															
95A1	Sleeve	3/8 x 3 3/4	A	D-Grip	Inside	4	102	1 1/8	43	1850	21 3/8	556	27	12.3	47
▲ 95LA1	Latch	3/8 x 3 3/4	A	D-Grip	Inside	4	102	1 1/8	43	1850	21 3/8	556	28	12.7	47
95LA3	Latch	1 x 4 1/4	C	D-Grip	Inside	4	102	1 1/8	43	1850	21 3/8	556	30	13.6	47

All Diggers have a 3/8" NPT inlet.
 A 1/2" (13mm) size hose recommended.
 Sound level is 95 dBA.
 Performance figures are at 90 psi (620 kPa) air pressure.
 *Use this code for selecting accessories from page 15.