


DRF 24 STOPERS

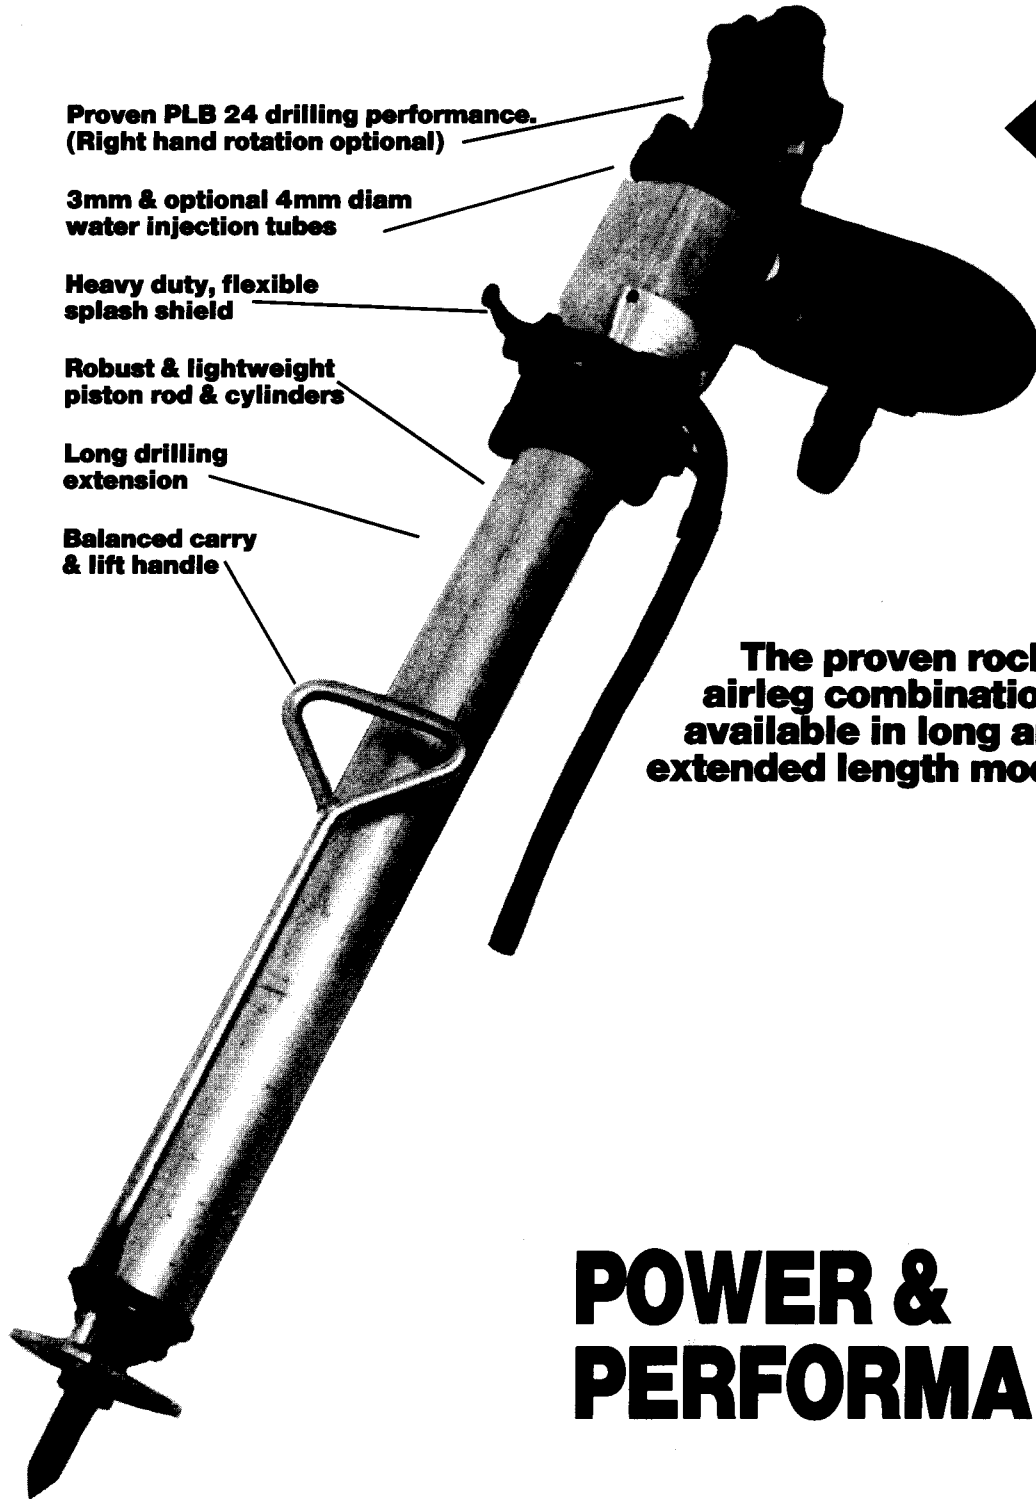

**Proven PLB 24 drilling performance.
(Right hand rotation optional)**

**3mm & optional 4mm diam
water injection tubes**

**Heavy duty, flexible
splash shield**

**Robust & lightweight
piston rod & cylinders**

**Long drilling
extension**

**Balanced carry
& lift handle**

**The proven rockdrill and
airleg combination,
available in long and
extended length models.**

POWER & PERFORMANCE

...PERFECTLY MATCHED.

Technical Data DRF 24 STOPERS

MODEL	DRF 24/120	DRF 24/130	DRF 24/170
WEIGHT	40.9 kg	41.4 kg	42.1 kg
EXTENDED LENGTH	2595 mm	2775 mm	3315 mm
RETRACTED LENGTH	1365 mm	1425 mm	1605 mm
1st STAGE EXTENSION	635 mm	695 mm	875 mm
2nd STAGE EXTENSION	595 mm	655 mm	835 mm
DRILL PISTON DIA	80 mm		
DRILL PISTON STROKE	60 mm		
LEG PISTON DIA	78/65 mm		
AIR CONNECTION	25mm/1 inch	USE WITH PLO 20 INLINE OILER	
AIR OPERATING PRESSURE	5-6 Bar		
AIR CONSUMPTION	4.0 m ³ /min at 6 bar		
WATER CONNECTION	13mm/½ inch		
FLUSHING WATER	8.8 Lites/min		
	MINIMUM THROUGHPUT FOR 2.4m DRILL STEEL		
	WATER PRESSURE IN ALL CASES AT 0.5 BAR LOWER THAN OPERATING PRESSURE		
TOOL SHANK	22 mm x 108 mm / 7/8" x 4¼" OPTION 25 mm x 108 mm/1" x 4¼"		



AUSTRALIAN SALES AND SERVICE
SWISS INDUSTRIAL COMPANY (AUST) PTY LTD

SYDNEY (02) 674 2122 **PERTH** (09) 362 4911 **KALGOORLIE** (090) 21 4400 **Mt ISA** (077) 43 8111 **BROKEN HILL** (080) 884 644