

HIRETECH

English

Steam Stripper

Deutsch

Dampf - Tapetenablöser

Français

Decapant Groupe Vaperur

Nederlands

Stoomafweker

Norska


Damp Stripper

MODEL:

STEAM TEAM HTW-5

HAGERTY WJH-1

From Serial No. 25800

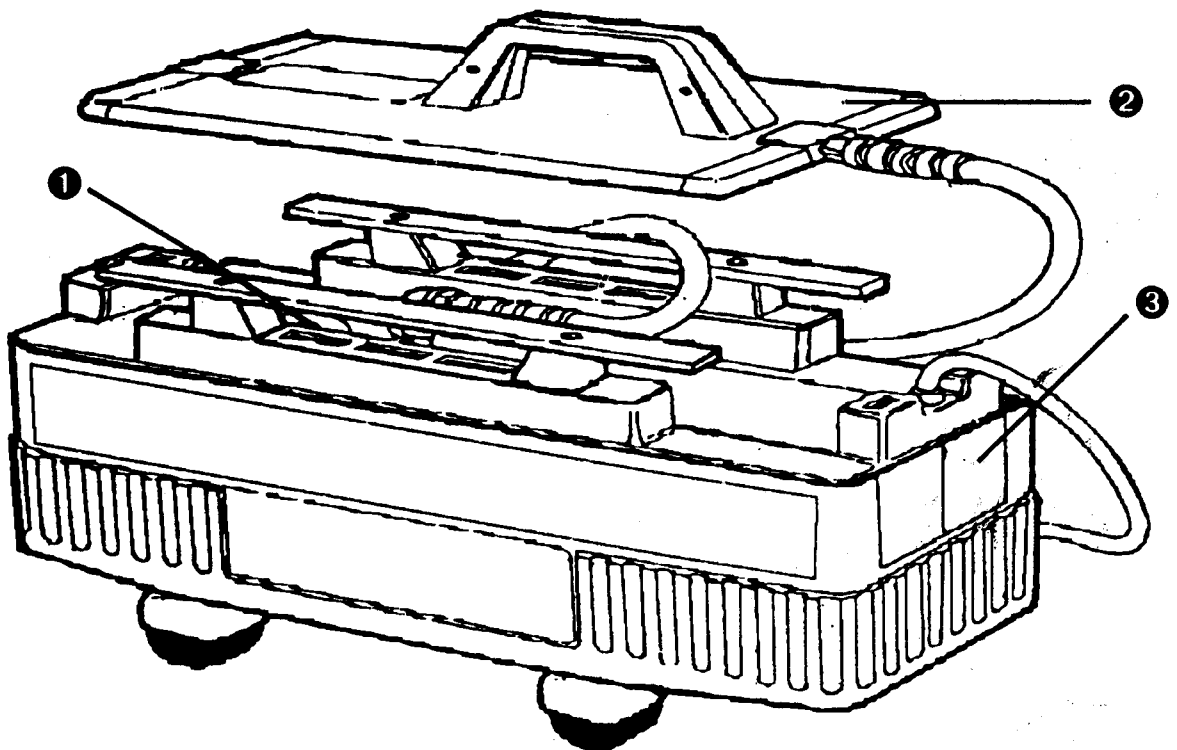

Owners Manual & Operating Instructions

Handbuch und Bedienungsanleitung

Manual d,Utilisateur et Mode d'Emploi

Handboek en Gebruiksaanwijzing

Eiers Håndbok og Operasjons Instruksjoner

3. Wait about 15 seconds, then move the steam plate across the wall to the next area slightly overlapping the area just steamed.
4. Loosen the edge of the covering with a stripping knife. A broad blade knife like the Steam Team Stripping Knife is recommended for best results. If the covering is difficult to strip allow a little longer to steam, you will quickly learn how long you need to steam the covering to make it easy to strip.
5. Using the stripping knife in a downwards direction at a 45° angle towards the steam plate, begin to strip the covering from the top of the wall and downwards all the time moving the steam plate ahead of the area just stripped.
6. During stripping steam will be collecting in the trough at the bottom of the steam plate and condensing into water, which should be drained away from time to time.
7. On completion of stripping the wall or ceiling surface should be washed down to remove any remaining pieces of covering, sterilised and sealed ready for new decoration. Use Steam Team Washprep and the Steam Team Abrasive Sponge to complete in one action.

OPERATING HINTS

1. Care should be taken to check the condition of the surface to be stripped. Should plaster on the wall be loose, it is probable that when the covering is removed the plaster or parts will come away. Check by gently tapping the wall all over, a hollow sound will indicate that the plaster is loose. In such circumstances repairs should be made.
2. To help clean the steam stripper after use a little Steam-boost in warm water to loosen pieces of covering stuck to the steam stripper, steam hose and steam plate.
3. When not in use ensure that the steam stripper is empty and dry. Always store in a dry place.

MAINTENANCE AND SERVICING

1. On completion of work allow the steam stripper to cool completely for a **MINIMUM OF 4 HOURS**. Remove the steam cap, turn the machine over and drain off remaining water by depressing the rubber safety valve located at the base of the tank filler neck. Replace cap, wipe down body and replace the steam hose, cable and steam plate. Store in a dry place.

IMPORTANT. The filler cap and filler neck must be maintained in good condition. Inspect both regularly and ensure that the filler cap locates properly and that both cap and filler neck are not worn or damaged in any way. If damage is noted do not use the steam stripper under any circumstances, return it to your dealer for service.

FAULT FINDING

Fault

Machine does not heat up

Action

Check power supply and fuse in plug. If fuse blows more than once return your steam stripper to nearest dealer for service.

Fault

Steam escaping from filler cap.

Action

Switch off and allow to cool for a **MINIMUM OF 2 MINUTES**. Using a glove and at arms length carefully remove the filler cap. Inspect the filler cap and filler neck for

signs of damage or dirt. If problem persists return machine to dealer for service.

On no account attempt to adjust or tighten the filler cap when the machine is switched on and steam pressure remains.

Fault

Steam stops prematurely (could be accompanied by an escape of steam from below machine - safety vent).

Action

CAUTION steam hose or steam outlets could be blocked. Disconnect from power supply. First check to see if hose is kinked or flattened. If not proceed with caution. Allow the machine to cool for a **MINIMUM OF 2 HOURS** to allow steam pressure to drop. Remove filler cap using gloves at arms length.

If cause can not be found return the machine to nearest dealer for service.

Fault

Filler cap rotates past 'stop' position.

Action

CAUTION Do not use machine, return to nearest dealer for service

Fault

Machine overheats.

Action

Check machine is on a level surface. If fault continues return to dealer for service.

Fault

Escape of water and/or steam from below machine as steam stripper heats up - safety vent.

Action

Machine has been over filled. Avoid over filling.

CAUTION Carpets and flooring should be protected to avoid damage as water and liquids are present at all times during stripping.

ENGLISH

SPECIFICATION

The Steam Team Steam Stripper will remove multiple layers of wallpaper and painted Anaglypta, foils and flocks, also papers covered in paint, distemper or varnish.

Power Supply:	110/120 V~ or 220/250 V~ Check data plate.
Heater Element:	1.4/1.6 kw or 2.2/2.5 kw.
Water Tank:	7 litres (1 ¹ / ₂ gallons) capacity.
Weight Dry:	7.0 kg (15.4lbs).

CAUTION: Read the following Safety and Operational notes before using your Steam Team Steam Stripper.

SAFETY

1. For your safety it is recommended that a residual current circuit breaker (R.C.C.B.) should be used with this product.
2. Ensure electrical supply conforms to that detailed on data label of this product. If in doubt consult a qualified electrician. Supply cable must be earthed.
3. The steam generated by this product is **DANGEROUS**. Keep children well away from work site.
4. Ensure steam hose is sound and securely fitted before use and that it is not kinked or becomes kinked or flattened in use.
5. **NEVER** remove filler cap on the steam tank when the steam stripper is in operation or attempt to adjust or tighten it if steam is seen to be escaping from around the filler cap area. Disconnect from power supply, allow to cool for a **MINIMUM OF 2 MINUTES** then check and refit cap.
6. **DO NOT** attempt to move the steam stripper unless the power has been disconnected and allowed to cool for a minimum of 5 minutes. To move steam stripper to a new work site lift by steam plate rails only.
7. Ensure adequate ventilation of work site.
8. Use clean **WATER** only to fill steam tank. Add Steam Team Steamboost to water as recommended to improve stripping performance. **ONLY** approved additives such as Steamboost can be used.
9. **NEVER** operate the steam stripper without water.
10. Always disconnect from power supply before filling with water or when not in use.
11. Take care when stripping paper from ceilings, hot water may run from the steam plate.
12. **DO NOT** use power socket directly below area being stripped. Take precautions to prevent water entering power sockets and light switches.
13. Power cable and steam hose must be maintained in good condition.
14. Operate steam stripper on level surface **DO NOT** use this product as a step.

OPERATION

1. Set up by clearing furniture from work area. Prepare for slight spillage, carpets and floors must be protected. Roll carpets back or protect with plastic sheet and dust sheet. Layout tools required ready to start work.
2. Place steam stripper on floor or stable level work surface near to the area to be stripped. Remove the steam plate and lay out the steam hose and power lead. **DO NOT** plug into power supply.

3. Remove the filler cap (see 11) and fill water tank with clean hot or cold tap water and Steam Team Steamboost to a maximum of 5cm (2") from top of tank. **DO NOT** over fill or cover rubber safety valve located at the base of the tank filling neck.
4. Replace the filler cap ensuring a correct fit. **NEVER** force or attempt to over tighten the filler cap (see 11).
5. Place the steam plate face up on the floor or work surface which should be protected from condensation when steam is first produced. Have a suitable container ready to collect water which will have condensed from the steam in the steam plate.
6. Plug in to a suitable power supply. The steam stripper will switch itself on automatically. Allow the steam stripper to heat the water until it turns to steam, 10 to 30 minutes.
7. When steady jets of steam are produced the steam stripper is ready to use. Lift the steam plate above the steam stripper this will allow water condensed in the steam hose from the steam to run back into the water tank.
8. Now begin stripping (see Stripping Technique). Continue using the steam stripper until the steam stops, about 60 to 80 minutes. When the steam stops the steam stripper is ready to be refilled. The steam stripper will switch off automatically when a low water level is reached. Of course you can stop when ever you wish, just disconnect from the power supply to switch off.
9. Refilling - **DISCONNECT** power supply and then allow the steam stripper to cool down for a **MINIMUM OF 2 MINUTES**.
10. **ENSURE** that the steam outlet holes in the steam plate are clear and that the steam hose is not kinked or flattened otherwise steam pressure in the water tank will be maintained for a long period.
11. The filler cap will be **HOT**, use a glove and do not stand directly over the steam stripper when removing it. Remove the cap at arms length. Lift the filler cap lever and wait for excess steam to vent. Then turn the cap anti-clockwise a **QUARTER** of a turn only. If steam continues to escape wait until it stops. **ONLY THEN** push down the filler cap against spring pressure and turn anti-clockwise a further quarter turn and pull up gently to remove. To refit cap push down against spring pressure and turn clockwise approximately half a turn to stop position. Lower filler cap lever to lock.
12. On finishing stripping allow the steam stripper to continue to run until it switches off automatically. Use a suitable container to catch the steam as it condenses to water. When the steam stripper switches off **DISCONNECT** power supply. Before the steam stripper cools completely carefully wipe down the body, steam hose and steam plate to clean.
13. Now allow the steam stripper to cool completely, carefully store the steam hose and cable and replace the steam plate. If work is completed and the steam stripper is to be stored prepare the machine as detailed in Maintenance and Servicing.

STRIPPING TECHNIQUE

1. To help steam and Steamboost to penetrate more quickly and speed up stripping perforate the cover with a Steam Team Perforator. This is important where papers are in multiple layers, painted over or are a vinyl type. To save even more time perforate the covering while waiting for the steam stripper to produce steam.
2. Start at the top of the wall and work across and downwards. Place the steam plate against the surface of the covering to be stripped.